

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

SPOOL SFGA
SFGA-GB50-1600-4600-24
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:

629-812-41310PT

Company / Project Reference:

Date.:



Page.:

1 OF 1


Document Package No.:

Rev.:

Inventor Drawing

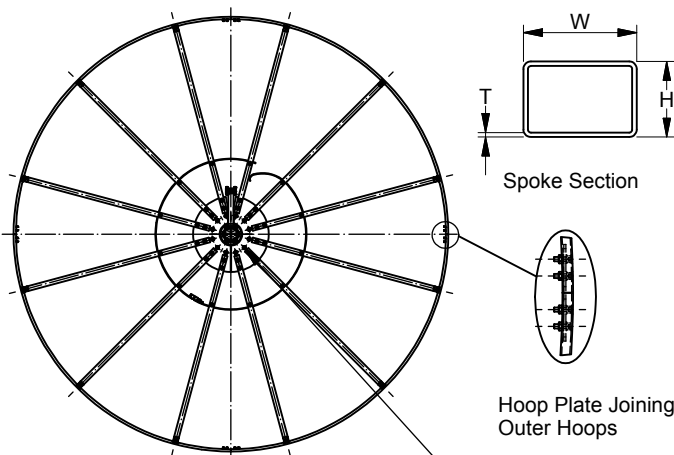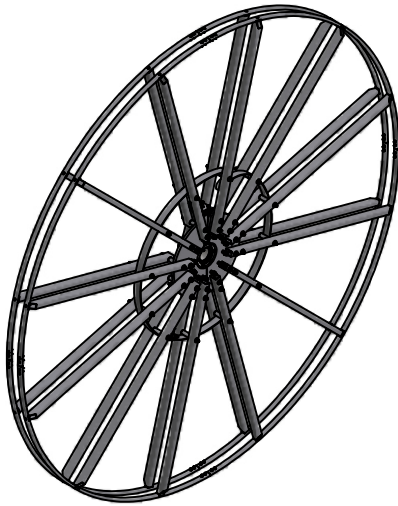

Front view

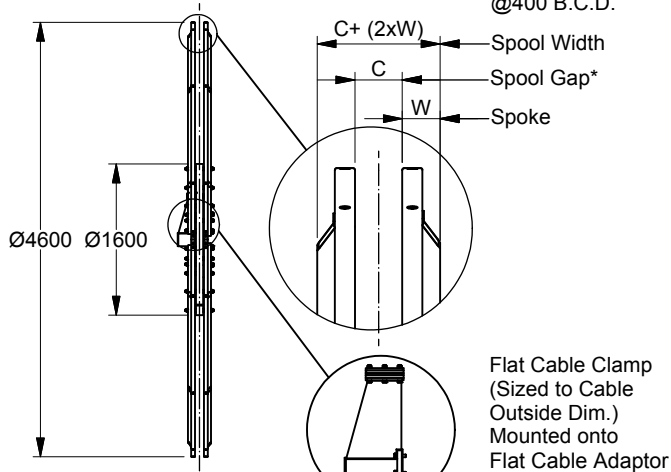

Side view

FEATURE	CODE
Spool Flat Galvanized	SFGA
Gearbox Size	GB50
Inside Diameter (mm)	1600
Outside Diameter (mm)	4600
Spoke Quantity	24

Example for ordering	SFGA-GB50-1600-4600-24
----------------------	------------------------

TECHNICAL DATA

Weight of Spool (kg)	513
Spoke W x H x T	75 X 50 X 3
Spool Gap (mm) C	* JOB SPECIFIC
Spool Width (mm)	C + (2 x W)
Mounting Holes	12 x Ø22
Mounting Bolts	12 x M20 x 90 DIN 931-10.9 DAC

NOMINAL SPECIFICATION

Spools are manufactured from standard components to form a modular bolted assembly.

This product is used for flat cable.

All structural fasteners are plated Gr. 10.9 bolts and all small non-structural fasteners are 304 stainless steel.

Standard spools are supplied with a hot dipped galvanized protective coating.

NOTES

Hillmar Spools can be customized to suit customer cable requirements.

All dimensions are in millimeters.

All figures given are nominal figures only.

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\beed48b-dfe1-4c56-9e15-9d931e8b4ebd\80000529580\HILLMAR\HILLMAR PRODUCTION\06 CABLE REEL\SPOOL\S\0700-607006001 SGF-SGR\SPC-SHT-SGF-SGR\FLAT\1310 SFGA-GB50-1600-4600-24.idw