

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

WHEEL BRAKE WBHD
WBHD-DT-RH-090-140-240
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Company / Project Reference:

Date.:

Page.:
1 OF 1

Sheet Number:

Job Number:




Form Number:

229-360-63085PT

Document Package No.:

Rev.:

Inventor Drawing

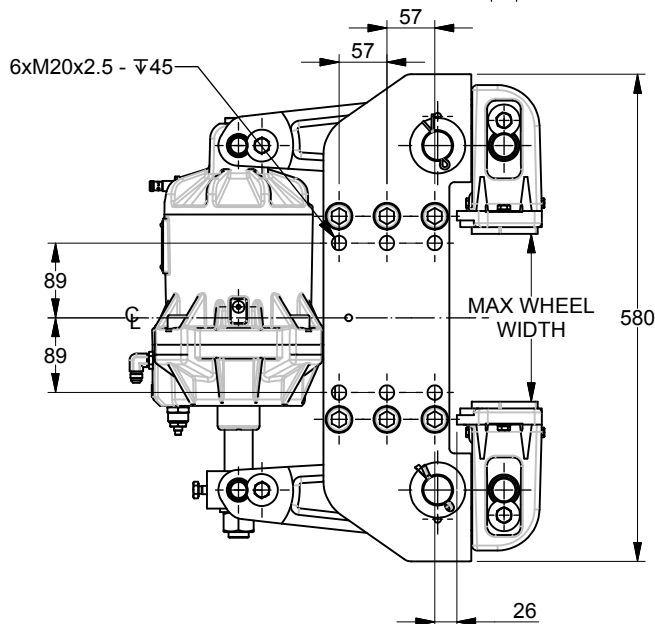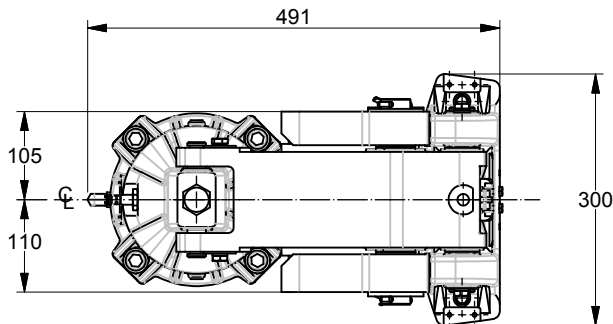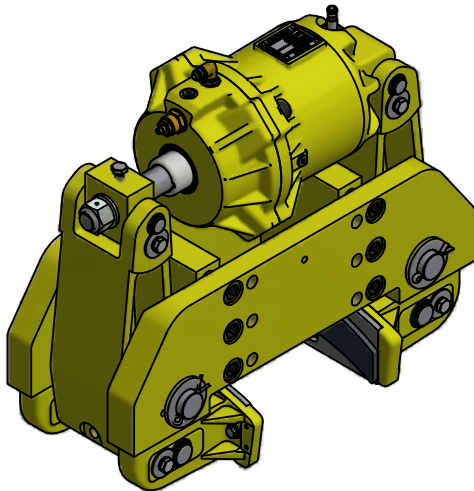

FEATURE	CODE
Wheel brake dynamic	WBHD-DT
Capacity (kN)	090
Right handing	RH
Wheel width (mm)	140-240

Example for ordering	WBHD-DT-RH-090-140-240
----------------------	------------------------

TECHNICAL DATA

Clamping force F_c (kN)	90
Braking force F_b (kN), $F_b = 2 \times F_c \times \mu$	90
Motor size (kw)	0.37
Total available stroke (mm)	20
Working stroke (mm)	14
Working stroke oil volume (l)	0.1
Release pressure (MPa)	6.5
Pressure port connection	-6 ORB
Drain port connection	-4 ORB
Min. recommended pipe size	-4 JIC
Temperature range (°C)	-20 to +70
Max. operating pressure (MPa)	14
Mounting holes drilled and tapped	6 x M20
Mounting bolts	6 x M20
Total pad area (cm ²)	380
Maximum pad wear (mm)	5
Weight with out oil (kg)	148
Minimum wheel flange width	102
Maximum wheel width	240

NOTES

Wheel surfaces must be clean, parallel and machined to $3,2\mu\text{m}$.

All machined surface must be kept clean to prevent brake contamination.

Actual published braking force may vary depending on friction factor and spring extension.

International patent apply.

All figures are nominal figures only.

All dimensions are in millimeters .

3D Model has been constrained for maximum wheel width

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\aac11476-e085-4c2e-848b-8bb6c81207a\80000530264\HILLMAR\HILLMAR PRODUCTION\02 STORM BRAKES\0700-2107002009 WBHD-DT-RH-090-140-240.dwg