

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

COUPLING RKM
RKM-ND-170-LSH
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:

429-660-34440PT

Company / Project Reference:

Date.:


Page.:

1 OF 1

Document Package No.:

Rev.:

Inventor Drawing

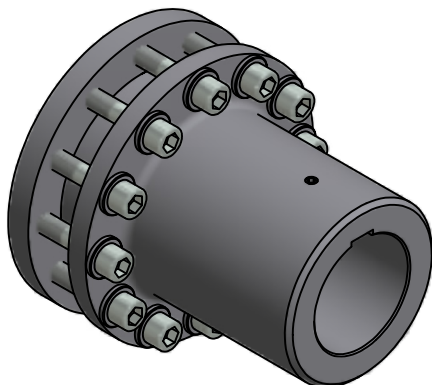

FEATURE	CODE
Rigid coupling	RKM
No disc	ND
Coupling size (Hub OD)	170
Load side	LSH
Maximum coupling torque (Nm)	2850

Example for ordering	RKM-ND-170-LSH
----------------------	----------------

TECHNICAL DATA

Hub bore size MIN. (mm)	45
D2 MAX. (mm)	75
Moment of inertia (kgm ²)	0.035
Mounting bolts	12 x M12
Bolt tightening torque (Nm)	84
MAX. coupling torque TkMAX (Nm)	2850
MAX. coupling speed (RPM)	3400
Weight (kg)	11,2

CUSTOMER SPECIFICATIONS


Load side
D2: _____ mm
M2: _____ mm
K2: _____ mm
R2: _____ mm
C2: _____ mm

NOTES

Coupling balancing grade ISO 1940-G6.3 is guaranteed for all coupling parts.

All figures are nominal figures only

All dimensions are in millimeters

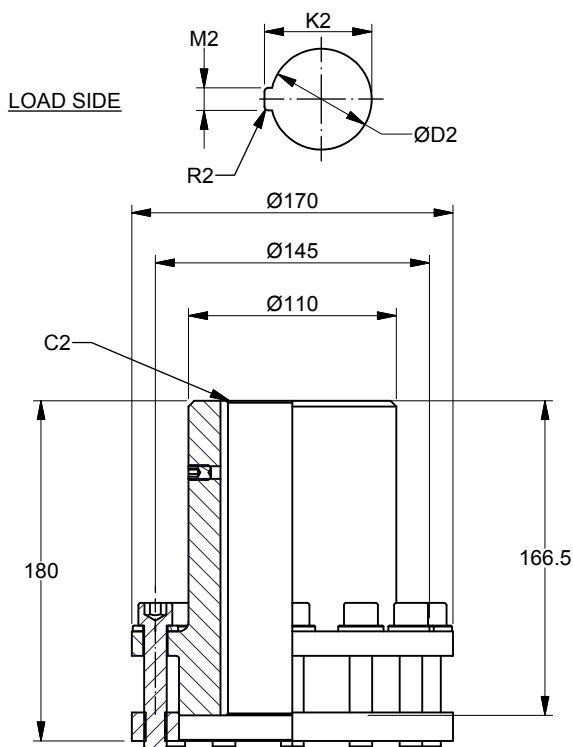

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\349bb3-e10c-4cd0-aed8-26c1c4c1b33780000528358\HILLMAR\HILLMAR PRODUCTION\04 THRUSTER DB\0700-4107004005 PKM-GKM-RKSM-RKX\SPC-SHT-PKM-GKM-RKSM-RKX\04 RKX\34440 RKM-ND-170-LSH.idw