

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

SPOOL SFGA
SFGA-GB25-1200-3400-16
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:
629-812-35933PT



Company / Project Reference:

Date.:


Page.:
1 OF 1

Document Package No.: Rev.:

Inventor Drawing

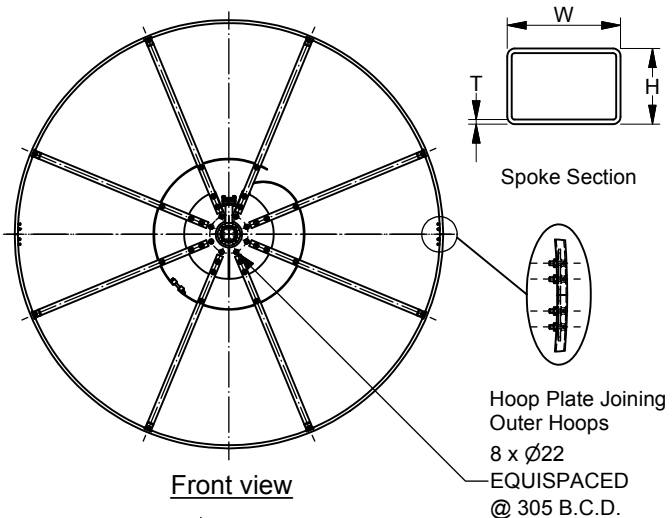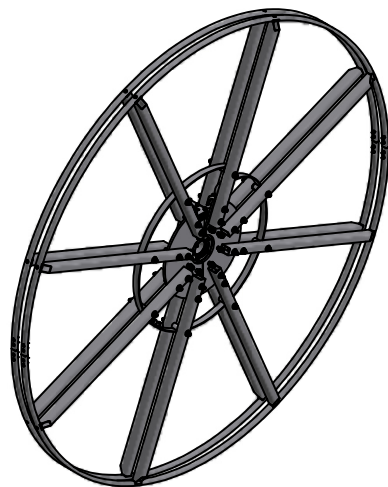

Front view

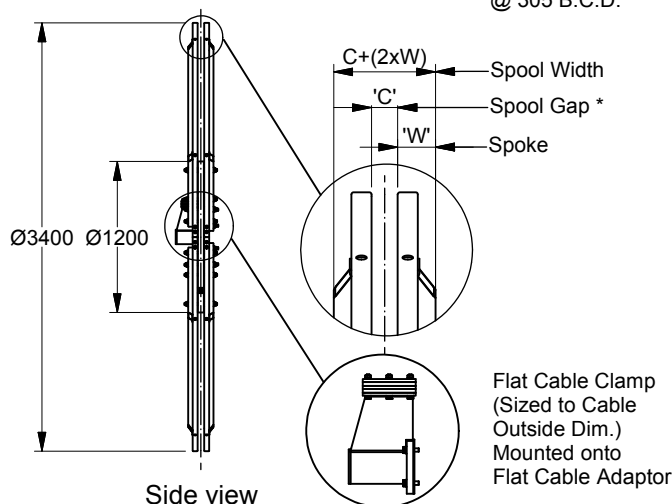

Side view

FEATURE	CODE
Spool Flat Galvanized	SFGA
Gearbox Size	GB25
Inside Diameter (mm)	1200
Outside Diameter (mm)	3400
Spoke Quantity	16

Example for ordering	SFGA-GB25-1200-3400-16
----------------------	------------------------

TECHNICAL DATA

Weight of Spool (kg)	273
Spoke W x H x T	75 X 50 X 3
Spool Gap (mm) C	* JOB SPECIFIC
Spool Width (mm)	C + (2 x W)
Mounting Holes	8 x Ø22
Mounting Bolts	8 x M20 x 70 DIN 931-10.9 DAC

NOMINAL SPECIFICATION

Spools are manufactured from standard components to form a modular bolted assembly.

This product is used for flat cable.

All structural fasteners are plated Gr. 10.9 bolts and all small non-structural fasteners are 304 stainless steel.

Standard spools are supplied with a hot dipped galvanized protective coating.

NOTES

Hillmar Spools can be customized to suit customer cable requirements.

All dimensions are in millimeters.

All figures given are nominal figures only.

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\beed48b-dfe1-4c56-9e15-9d931e8b4ebd\80000529212\HILLMAR\HILLMAR PRODUCTION\06 CABLE REEL\SPLOOS\0700-607006001 SGF-SGR\SPC-SHT-SGF-SGR\FLAT\35933 SFGA-GB25-1200-3400-16.idw