

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

RAIL CLAMP LETM050
CTHV-LH-800-050-LE-W08-225PR6
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Company / Project Reference:

Date.:

Page.:
1 OF 1

Sheet Number:

Job Number:


Form Number:

229-110-44080PT

Document Package No.:

Rev.:

Inventor Drawing

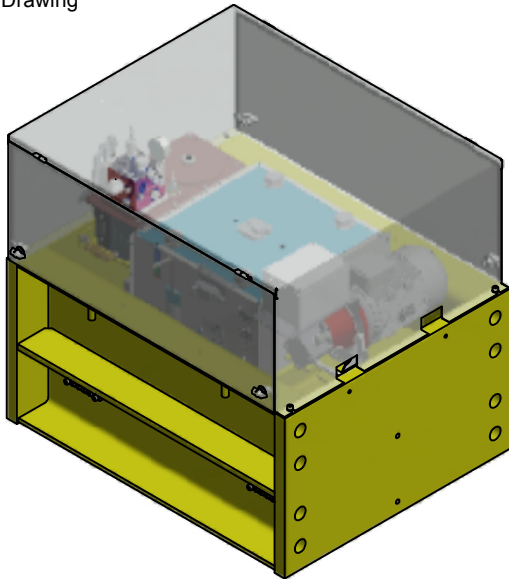

FEATURE	CODE
Rail Clamp type	CTHV-LH
Holding force	800
Coefficient of friction	050
Power unit	LE
Wedge	W08
Motor - pump	225PR6

Example for ordering **CTHV-LH-800-050-LE-W08-225PR6**

TECHNICAL DATA

Nominal holding force (kN)	800
Standard release pressure (MPa)	13.5
Maximum operating pressure (Mpa)	14.95
Cylinder volume (full stroke) (cm ³)	934
Cylinder volume (working stroke) (cm ³)	824
Release time (s)	2-3
Mounting holes	8 x Ø42
Mounting bolts	8 x M39 CL 10.9
Approximate weight (kg)	1180
Mechanism - horizontal float (mm)	±25
Mechanism - vertical float (mm)	±25
Shipping crate (L x W x H) (mm)	1200 x 1000 x 1250

NOMINAL SPECIFICATION

Spring set - Hydraulically released device.

Control voltage electrical junction box connection to be drilled to suit requirements by customer.


Manual release by integrally mounted hydraulic handpump.

RAIL WIDTH (mm)	MINIMUM TROUGH WIDTH TW (mm)
71 - 95	315
96 - 119	350
120 - 135	360
136 - 150	380

NOTES

All figures are nominal figures only.

All dimensions are in millimeters.

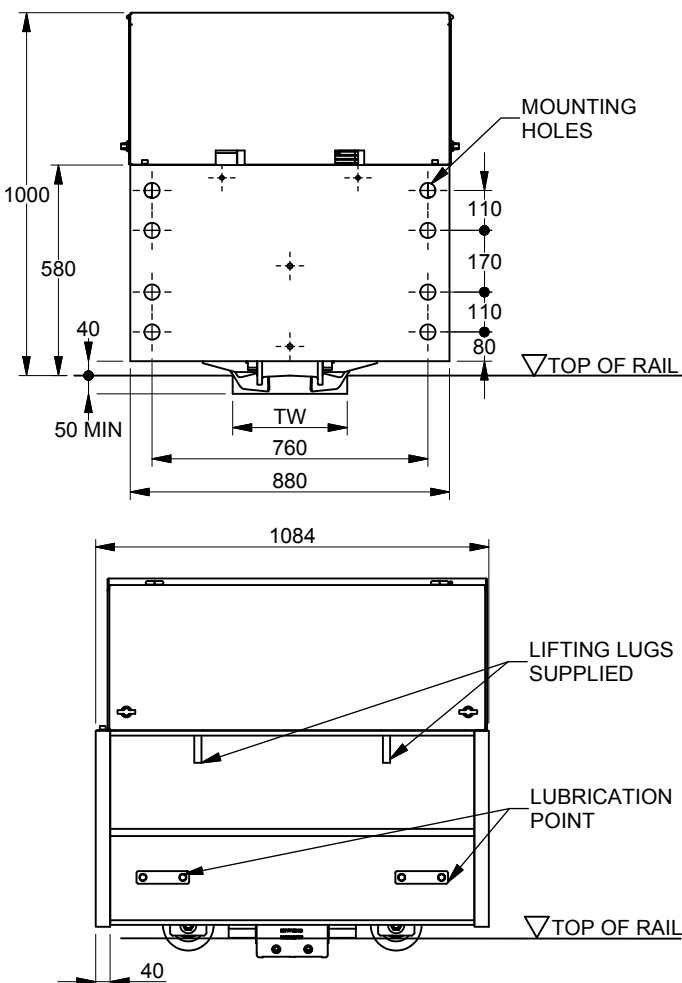

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\8018fbd-2cfe-4383-90b7-6e577a53a6dd\80000524113\HILLMARIHILLMAR PRODUCTION\02 STORM BRAKES\0700-2\07002001 CTHV-LH-800-050-LE-W08-225PR6.idw