

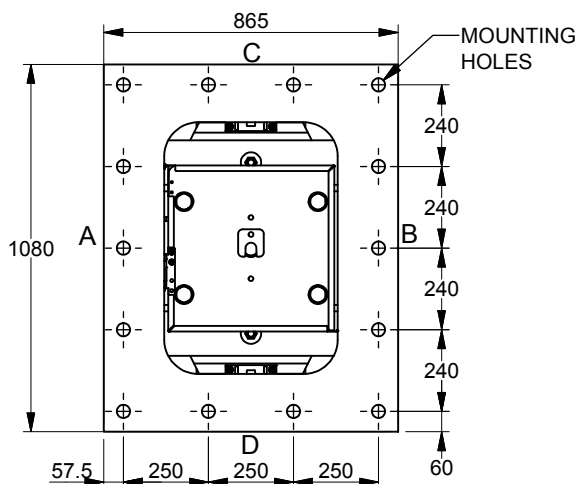


Inventor Drawing

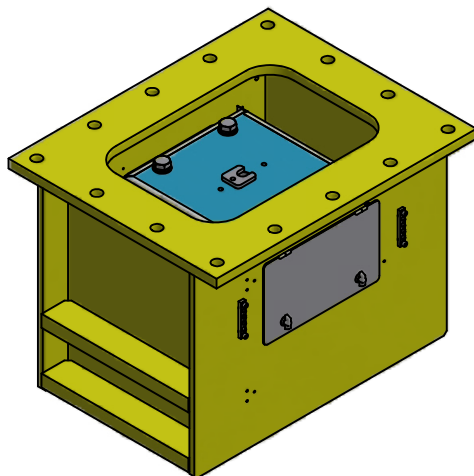

INSTALLATION SHIMS
(BY CUSTOMER)

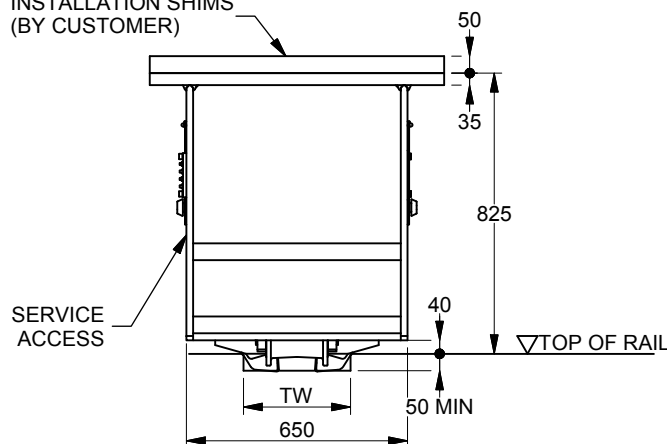

FEATURE	CODE
Rail Clamp type	CBHV-LH
Holding force	1000
Coefficient of friction	050
Wedge	W05
No power unit	RP

Example for ordering	CBHV-LH-1000-050-W05-RP
----------------------	-------------------------

TECHNICAL DATA

Nominal holding force (kN)	1000
Standard release pressure (MPa)	13.5
Maximum operating pressure (Mpa)	14.95
Cylinder volume (full stroke) (cm3)	934
Cylinder volume (working stroke) (cm3)	824
Mounting holes	14 x Ø39
Mounting bolts	14 x M 36 CL 10.9
Approximate weight (kg)	1430
Mechanism - horizontal float (mm)	±25
Mechanism - vertical float (mm)	±25
Hydraulic connection	-6 37° JIC
Shipping crate (L x W x H) (mm)	1200 x 1000 x 1250

NOMINAL SPECIFICATION

Spring set - Hydraulically released device.

Control voltage electrical junction box connection to be drilled to suit requirements by customer.

RAIL WIDTH (mm)	MINIMUM TROUGH WIDTH TW (mm)
71 - 95	315
96 - 119	350
120 - 135	360
136 - 150	380

NOTES

All figures are nominal figures only.

All dimensions are in millimeters.