

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

COUPLING RKM
RKM-145-LSH-0400-20-1800
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:
429-660-46535PT


Company / Project Reference:

Date.:


Page.:
1 OF 1

Document Package No.: Rev.:

Inventor Drawing

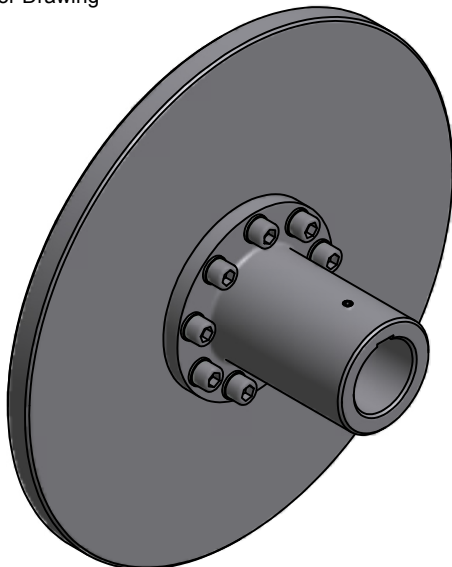

LOAD SIDE

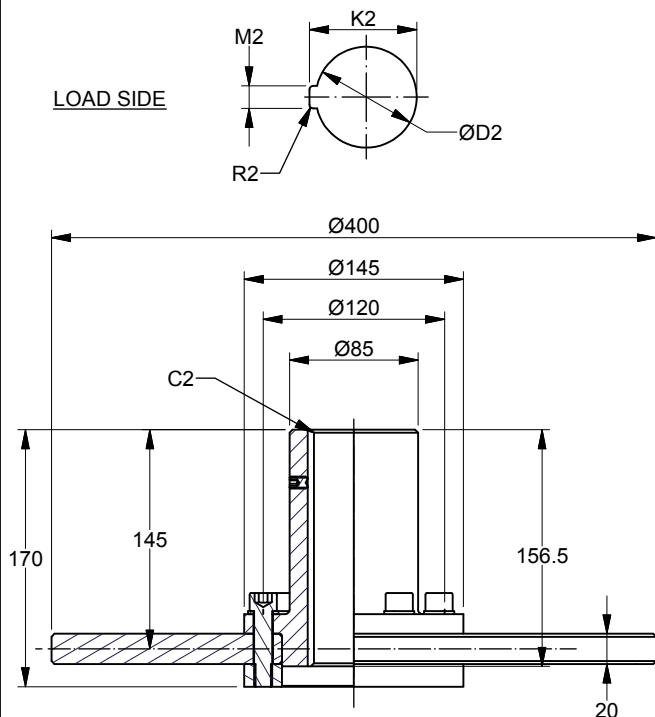

FEATURE	CODE
Rigid coupling	RKM
Coupling size (Hub OD)	145
Load side	LSH
Disc diameter (mm)	0400
Disc thickness (mm)	20
Maximum coupling torque (Nm)	1800

Example for ordering	RKM-145-LSH-0400-20-1800
----------------------	--------------------------

TECHNICAL DATA

Disc model	SDBD-0400-20-145
Disc diameter (mm)	400
Hub bore size MIN. (mm)	40
D2 MAX. (mm)	60
Moment of inertia (kgm ²)	0.406
Mounting bolts	9 x M12
Bolt tightening torque (Nm)	84
MAX. coupling torque TkMAX (Nm)	1800
MAX. coupling speed (RPM)	3800
Weight (kg)	25

CUSTOMER SPECIFICATIONS

Load side
D2: _____ mm
M2: _____ mm
K2: _____ mm
R2: _____ mm
C2: _____ mm

NOTES

Coupling balancing grade ISO 1940-G6.3 is guaranteed for all coupling parts.

All figures are nominal figures only

All dimensions are in millimeters

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\349bb3-e10c-4cd0-aed8-26c1b3378000\528367\HILLMAR\HILLMAR PRODUCTION\04 THRUSTER DB\0700-4107004005 PKM-GKM-RKSM-RKX\SPC-SHT-PKM-GKM-RKSM-RKX\04 RKX\46535 RKM-145-LSH-0400-20-1800.dwg