

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

COUPLING RKM
RKM-300-LSH-0710-30-17550
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:

429-660-46821PT

Company / Project Reference:

Date.:


Page.:

1 OF 1



Document Package No.:

Rev.:

Inventor Drawing

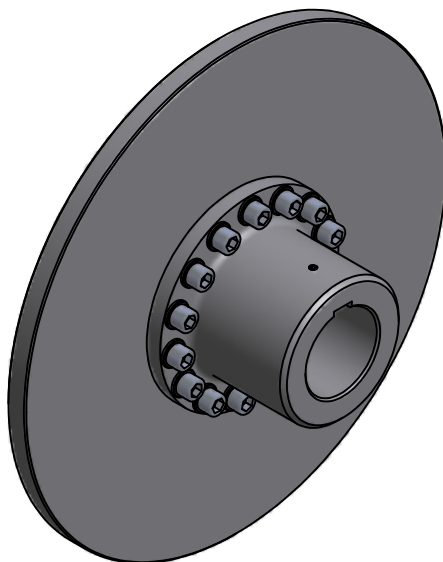

LOAD SIDE

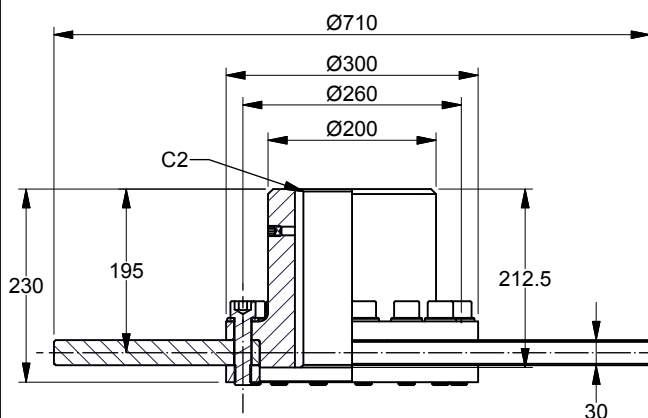

FEATURE	CODE
Rigid coupling	RKM
Coupling size (Hub OD)	300
Load side	LSH
Disc diameter (mm)	0710
Disc thickness (mm)	30
Maximum coupling torque (Nm)	17550

Example for ordering	RKM-300-LSH-0710-30-17550
----------------------	---------------------------

TECHNICAL DATA

Disc model	SDBD-0710-30-300
Disc diameter (mm)	710
Hub bore size MIN. (mm)	90
D2 MAX. (mm)	140
Moment of inertia (kgm ²)	6.213
Mounting bolts	15 x M20
Bolt tightening torque (Nm)	410
MAX. coupling torque TkMAX (Nm)	17550
MAX. coupling speed (RPM)	2200
Weight (kg)	128

CUSTOMER SPECIFICATIONS

Load side
D2: _____ mm
M2: _____ mm
K2: _____ mm
R2: _____ mm
C2: _____ mm

NOTES

Coupling balancing grade ISO 1940-G6.3 is guaranteed for all coupling parts.

All figures are nominal figures only

All dimensions are in millimeters

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\349bb3-e10c-4cd0-aed8-26c1b3378000\528388\HILLMAR\HILLMAR PRODUCTION\04 THRUSTER DB\0700-4107004005 PKM-GKM-RKSM-RKX\SPC-SHT-PKM-GKM-RKSM-RKX\SPC-SHT-PKM-GKM-RKSM-RKX\04 RKX\46821 RKM-300-LSH-0710-30-17550.idw