

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

HYD PWR UNIT 40-DBQS HPT40-DBQS-MB2V2-750PR22

SPECIFICATION SHEET

SLS & MKTG

ENGLISH

Sheet Number:

Job Number:

Form Number:

129-524-73180PT

Company / Project Reference:

Date.:


Page.:

1 OF 1

Document Package No.:

Rev.:

Inventor Drawing

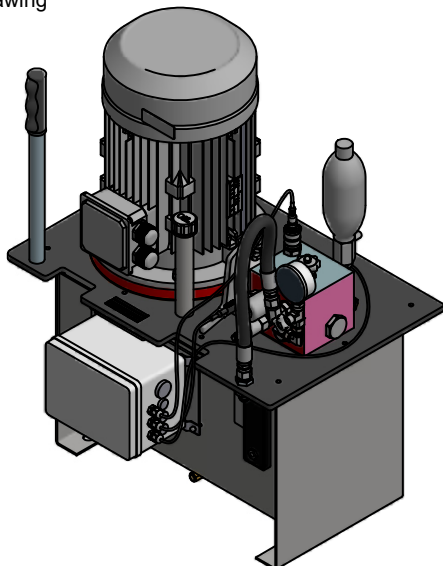

FEATURE	CODE
Hydraulic power unit	HPT
Oil volume	40
Reservoir SS304	DBQS
Manifold	MB2V2
Motor - pump	750PR22

Example for ordering

HPT40-DBQS-MB2V2-750PR22

TECHNICAL DATA

Motor size (kW)	7.5
Oil volume (L)	40
Maximum pressure (MPa)	20
Hydraulic fittings (oil supply) T1	-6 x 37° JIC
Mounting holes	4 x Ø18
Mounting bolts	4 x M16
Weight w/o oil (kg)	110

NOMINAL SPECIFICATION

Stainless steel reservoir.

Gear pump and high-pressure outlet filter.

Circuit manifold having check-valve, relief valve, normally open solenoid valve with manual override, pressure gauge with isolation valve, flow control, motor cut-out pressure switch, accumulator with flow control valve.

Control voltage electrical junction box connection to be drilled to suit requirements by customer.



For electrical motor junction box connection see motor specification sheet for details.

NOTES

Hillmar power units can be customized to suit customer's special requirements

All figures are nominal figures only

All dimensions are in millimeters

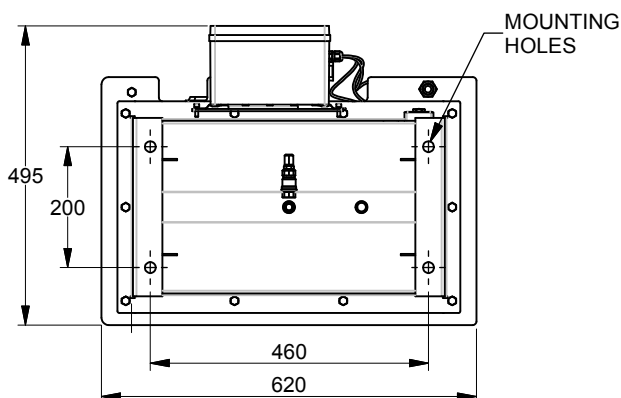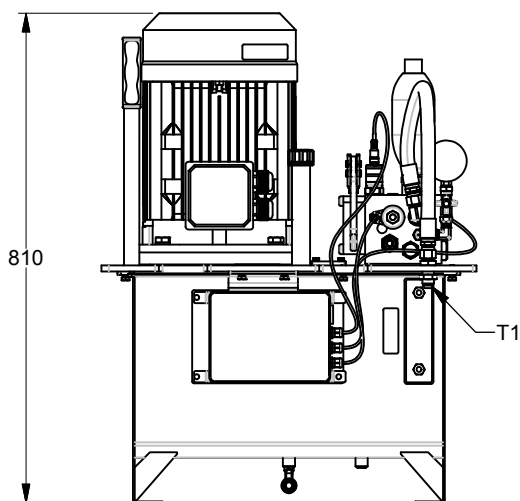

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\08e4c4d-0a2e-4a83-b731-beee3676124a\80000523429\HILLMAR\HILLMAR PRODUCTION\01 HYD PWR UNIT\0700-107001006 HPT-QS\SSPC-SHT-HPT-QS\73180 HPT40-DBQS-MB2V2-750PR22.dwg