

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

CABLE REEL DA-MCGBSRFO DA-GB50DD-0610KVFO-ME25-50

SPECIFICATION SHEET

SLS & MKTG

ENGLISH

Sheet Number:

Job Number:

Form Number:

629-863-75951PT

Document Package No.:




Rev.:

Company / Project Reference:

Date.:

Page.:

Inventor Drawing

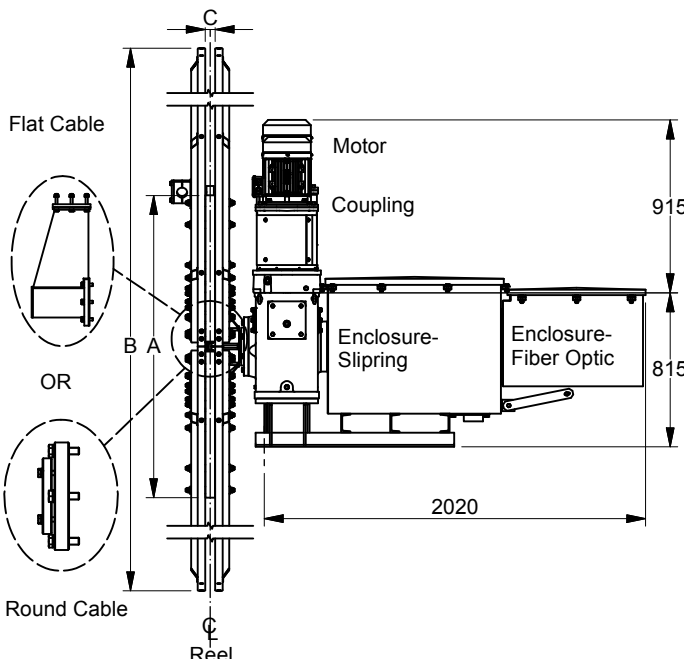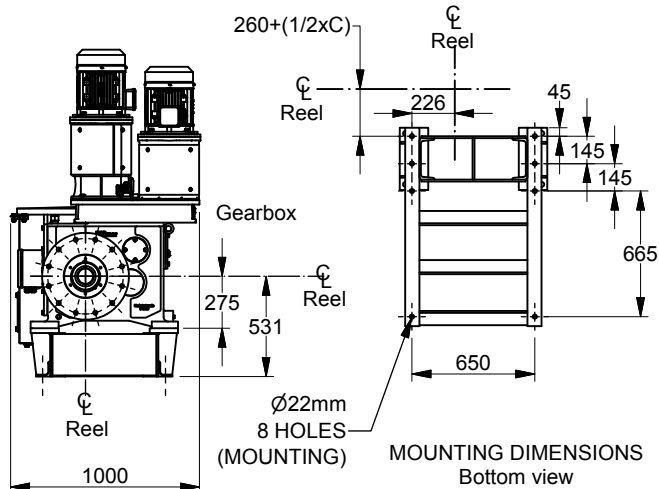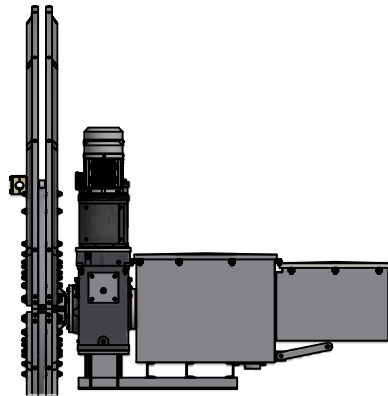

FEATURE	CODE
Drive Assy Power Reel	DA
Gearbox Dual Drive	GB50DD
Voltage	0610KV
Fiber Optic	FO
Magnetic Copupling	ME25
Magnetic Coupling Torque Nm	50 (50)

Example for ordering	DA-GB50DD-0610KVFO-ME25-50
----------------------	----------------------------

TECHNICAL DATA

Motor Size	5.5 kW
Spool Sizes Available	4.0m to 8.5m
Gearbox Hollow Shaft	90mm
Gearbox Drive Torque Nm	8000
Gearbox Max Overhang Load	75kN
Slipping Enclosure Design	06-10kV
Rotary Switch Ratio	RS
Drive Weight Excluding Spool	980kg
Spool Weight	Contract Specific
Mounting Holes	8 x Ø22
Mounting Bolts	8 x M20 GR10.9
Slipping Enclosure	SS304

NOTES

For Other Reel Types refer to one of the following sections:

Flat Cable Reel

Hose Reel

Control Reel

Vector drive Reel

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\c0400308-2d99-417b-8fde-023eba837fd\80000529758\HILLMAR\HILLMAR PRODUCTION\06 CABLE REEL\CABLE REEL DA0700-607006002 DAPR-MCGBSR\SPC-SHT-DAPR-MCGBSR\75951 DA-GB50DD-0610KVFO-ME25-50.dwg