
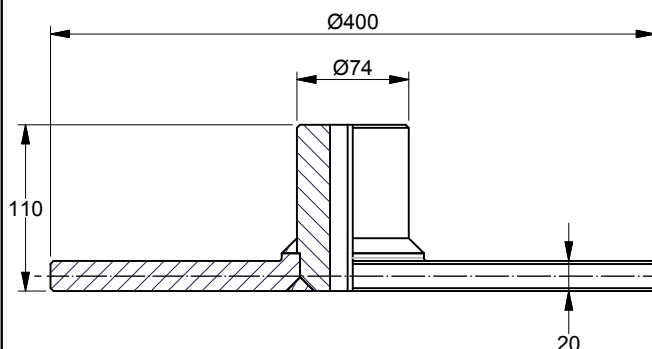
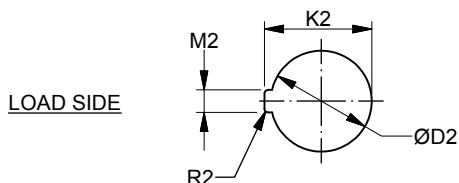


Inventor Drawing

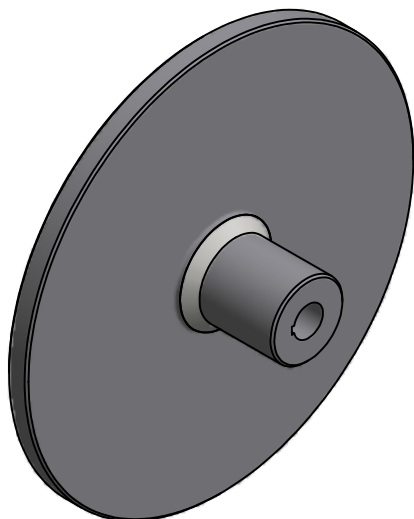

FEATURE	CODE
Rigid coupling	RKMWD
Coupling size (Hub OD)	120
Load side	LSH
Disc diameter (mm)	0400
Disc thickness (mm)	20
Maximum coupling torque (Nm)	1050

Example for ordering	RKMWD-120-LSH-0400-20-1050
-----------------------------	-----------------------------------

TECHNICAL DATA

Disc model	SDWD-0400-20
Disc diameter (mm)	400
Hub bore size MIN. (mm)	30
D2 MAX. (mm)	48
Moment of inertia (kgm ²)	0.396
MAX. coupling torque TkMAX (Nm)	1050
MAX. coupling speed (RPM)	1875
Weight (kg)	21.6

CUSTOMER SPECIFICATIONS

Load side
D2: _____ mm
M2: _____ mm
K2: _____ mm
R2: _____ mm
C2: _____ mm

NOTES

Coupling balancing grade ISO 1940-G6.3 is guaranteed for all coupling parts.

All figures are nominal figures only

All dimensions are in millimeters

Document Template #710-101-62058

*** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE ***

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)