

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

RAIL CLAMP RPTM025
CTHV-LH-500-025-W05-RP
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:

229-108-77836PT

Company / Project Reference:

Date.:



Page.:

1 OF 1

Document Package No.:

Rev.:

Inventor Drawing

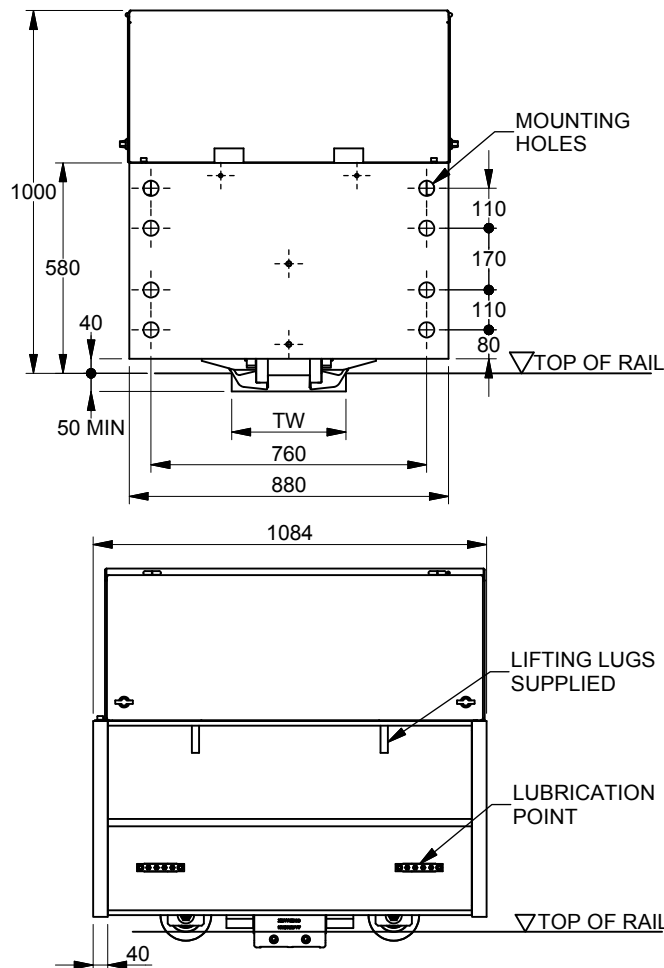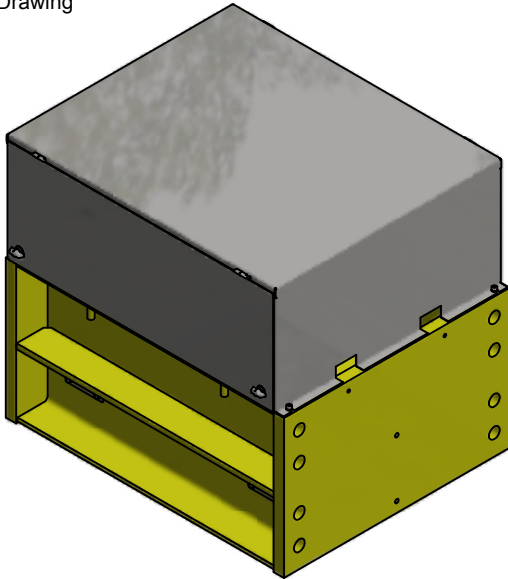

FEATURE	CODE
Rail Clamp type	CTHV-LH
Holding force	500
Coefficient of friction	025
Wedge	W05
No power unit	RP

Example for ordering	CTHV-LH-500-025-W05-RP
----------------------	------------------------

TECHNICAL DATA

Nominal holding force (kN)	500
Standard release pressure (MPa)	11.5
Maximum operating pressure (Mpa)	12.95
Cylinder volume (full stroke) (cm3)	934
Cylinder volume (working stroke) (cm3)	824
Mounting holes	8 x Ø42
Mounting bolts	8 x M39 CL 8.8
Approximate weight (kg)	1130
Mechanism - horizontal float (mm)	±25
Mechanism - vertical float (mm)	±25
Hydraulic connection	-6 37° JIC
Shipping crate (L x W x H) (mm)	1200 x 1000 x 1250

NOMINAL SPECIFICATION

Spring set - Hydraulically released device.

Control voltage electrical junction box connection to be drilled to suit requirements by customer.

RAIL WIDTH (mm)	MINIMUM TROUGH WIDTH TW (mm)
71 - 95	315
96 - 119	350
120 - 135	360
136 - 150	380

NOTES

All figures are nominal figures only.

All dimensions are in millimeters.

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\4f362cf-34ac-43a4-acaa-8a83e39d6800\00524301\HILLMAR\HILLMAR PRODUCTION\02 STORM BRAKES\0700-207002001 CTHV-LH\SPC-SHT-CXHV-LH04 CTHV-LH-500-025-W05-RP-1.dwg