

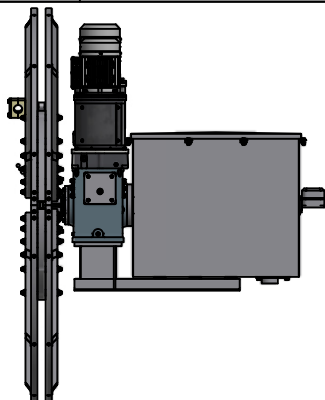


Inventor Drawing

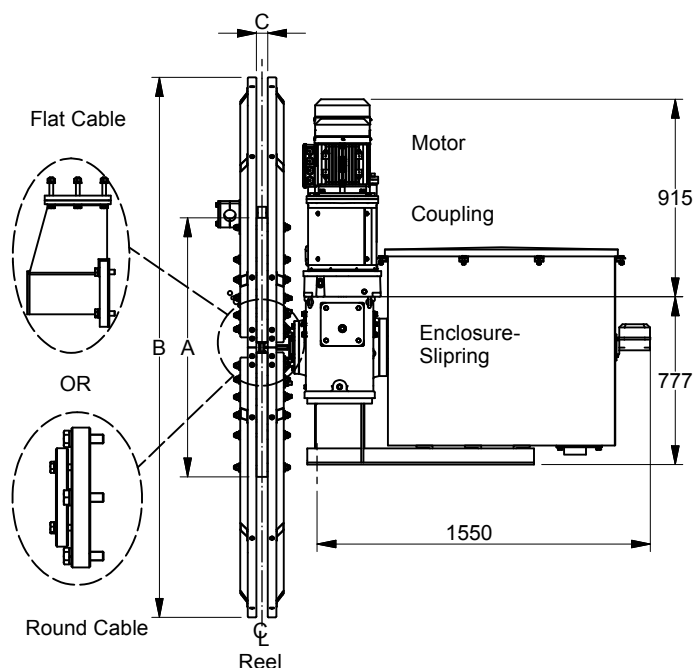

FEATURE	CODE
Drive Assy Power Reel	DA
Gearbox Dual Drive	GB25DD
Voltage	15KV
Fiber Optic	Not available
Magnetic Copupling	ME25
Magnetic Coupling Torque Nm	50 (50)

Example for ordering	DA-GB25DD-15KV-ME25-50
-----------------------------	------------------------

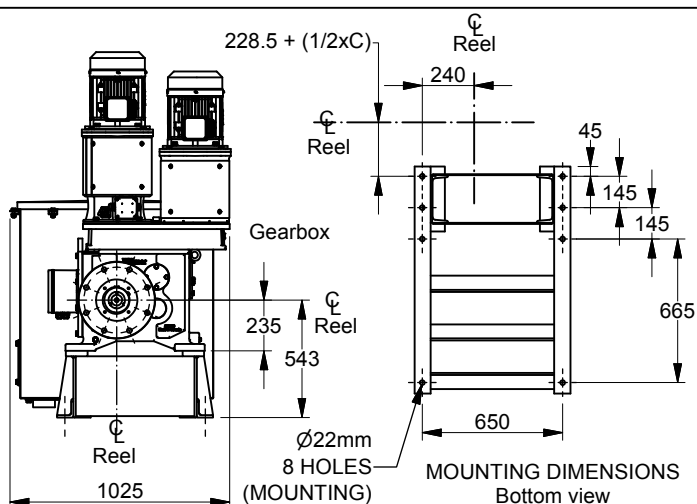

TECHNICAL DATA

Motor Size	5.5 kW
Spool Sizes Available	2.5m to 6.0m
Gearbox Hollow Shaft	76mm
Gearbox Drive Torque Nm	4000
Gearbox Max Overhang Load	36kN
Slipring Enclosure Design	15kV
Rotary Switch Ratio	RS
Drive Weight Excluding Spool	800kg
Spool Weight	Contract Specific
Mounting Holes	8 x Ø22
Mounting Bolts	8 x M20 GR10.9
Slipring Enclosure	SS304

NOTES

For Other Reel Types refer to one of the following sections:

Flat Cable Reel

Hose Reel

Control Reel

Vector drive Reel

Document Template #710-101-62058

**** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE ****

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)